

An innovative solution

- A compact design, it integrates a larger number of sockets adapted to IT environments, facilitating connection.
- A modern design that can be installed on the floor or on a desk, or also be mounted to the wall.

Protection adapted to meet all your needs

- 5 or 6 output sockets (5 british standard, 6 italian/schuko or french standard) for easy distribution directly to your applications:
 - 4 sockets protected against power cuts and over voltages, aimed at your most sensitive applications (central systems, monitors). The back-up time, able to last up to 30 minutes, enables a standard PC configuration to be saved.
 - 2 sockets (1 for BS) protected against over voltages alone for use with less critical applications (1200 VA) and high absorption consumers (laser printers).

Protection for your phone line

- Protection for the telephone/modem/ADSL line (RJ11 connector) against the risk of on-line overvoltage.

Easy to use

- Operating mode indicated by means of the mimic panel connected to the status indicator lights and the **UNI VISION** communication software.
- Easy battery maintenance (user replaceable).

HIGH
FREQUENCY UPS

2 YEAR GUARANTEE




NETYS 038 B 1 CAT

Your protection for


- > PC: LCD or CRT monitors, scanners, printers, etc.
- > Cash registers
- > Interactive terminals



Connections

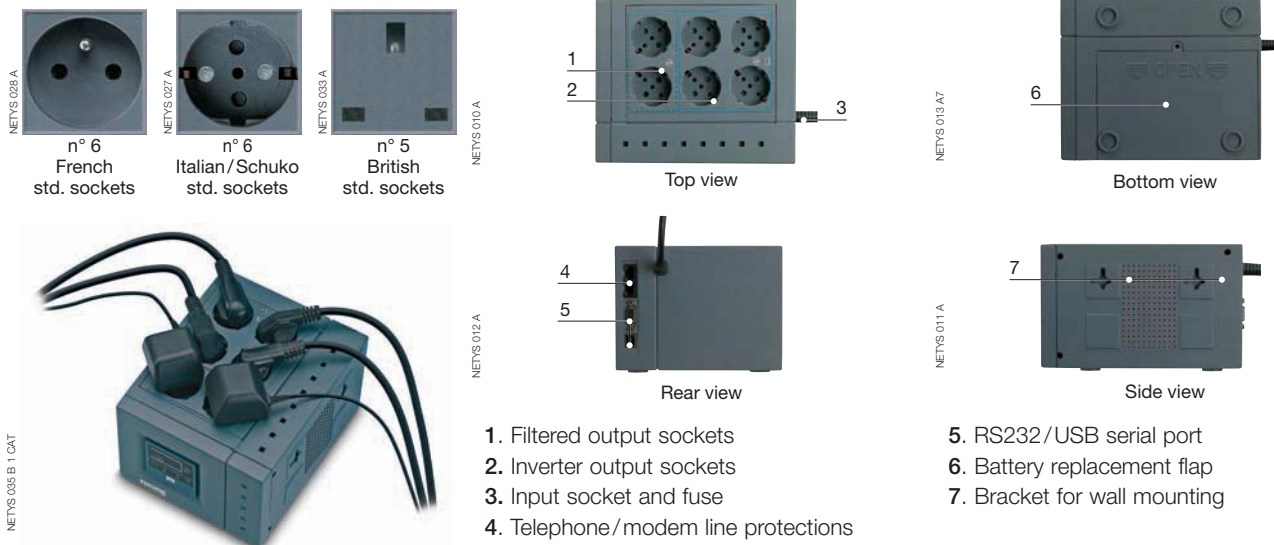

Control panel

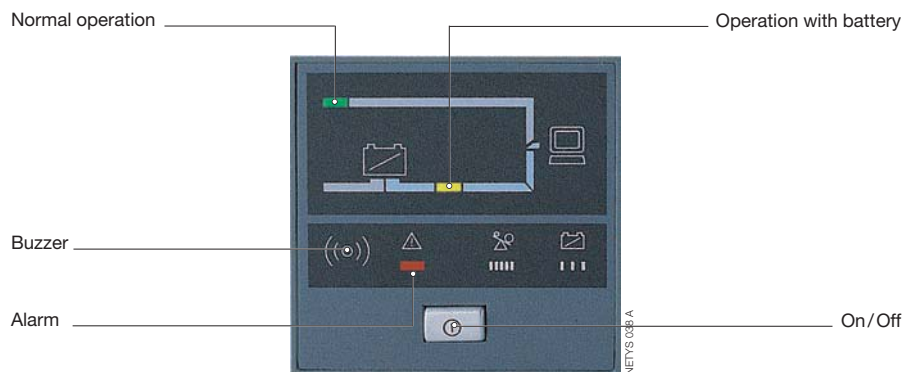

Communication option

- **UNI VISION** software for the control and automatic shutdown of applications connected to Windows™ and Linux. Free to download from our website: www.socomec.com. [Info. p. 87]

Technical data

MODELS	NETYS PL 550	NETYS PL 750
ITEM CODE	NET550F-PL	NET750F-PL
UPS power	550 VA (330 W)	750 VA (450 W)
Power (surge)	1 200 VA	1 200 VA
Input	230 V (170 ÷ 260 V); 50/60 Hz with automatic selection	
Output	230 V nominal; 50/60 Hz	
Output socket	6 sockets: n° 4 UPS and n° 2 surge (over voltage)	
Telephone protection	telephone line/modem/ADSL input/output: RJ11	
BATTERIES		
Type	sealed lead-acid maintenance free - expected life 3/5 years	
Back-up time ⁽¹⁾	20 min.	30 min.
COMMUNICATION		
Interface	RS232 and USB serial port (free software via Internet)	
ENVIRONMENT		
Dimensions W x D x H (mm)	160 x 210 x 125	
Weight	5.3 kg	5.5 kg
Reference standards	(EN) IEC62040-1-1 (safety), EN50091-2/IEC62040-2 (EMC), EN61000-4-5/C62.41: 1991 (over voltages)	

(1) PC + 15" LCD monitor.